


If=100mA, Vf=3.3(TYP.)

Colour: White

BACKLIGHT CIRCUIT DIAGRAM



DOT Detail:S=10:1

NO	Part Name	Quantity
5	BACKLIGHT	1
4	Black Tape(8*11)	1
3	FPC	1
2	IC(SI7567)	1
1	LCD	1

CUSTOMER APPROVAL:



DRAWN:

YXH  
2011-06-20

CHECKED:

CSG  
2011-06-20

APPROVED:


HHS  
2011-06-20


LCM NO: JAZZ-AC-W6WFDW

Rev: 00 UNITS: mm

DWG NO: JAZZ-AC-W6WFDW

SHEET 1 OF 2



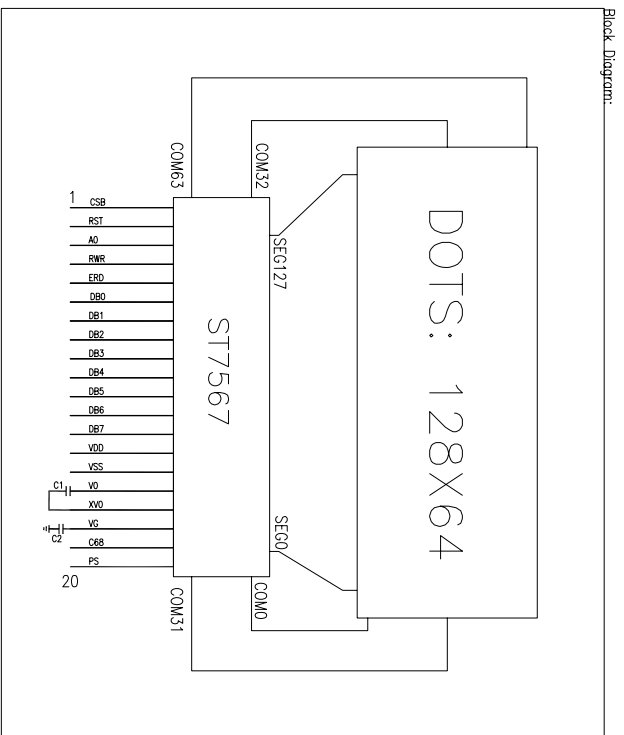

Pin Description:

Pin	Symbol	Function Description
1	CSB	Chip select input pin
2	RST	Reset input pin
3	A0	Register select pin
4	RWR	Read/Write execution control pin
5	ERD	Read/Write execution control pin
6	DB0	8-bit parallel interface
7	DB1	8-bit parallel interface
8	DB2	8-bit parallel interface
9	DB3	8-bit parallel interface
10	DB4	8-bit parallel interface
11	DB5	8-bit parallel interface
12	DB6	8-bit parallel interface(SCL)
13	DB7	8-bit parallel interface(SDA)
14	VDD	Power supply
15	VSS	Ground
16	V0	Connect 1uF cap to the XV0 PIN
17	XV0	Connect 1uF cap to the V0 PIN
18	VG	LCD driving voltage for segment circuits
19	C68	Parallel interface mode(6800=1;8080=0)
20	PS	PSB selects the interface type

DISPLAY TYPE:**FSTN**, Transflective, Positive  
 VIEWING DIRECTION: 6:00  
 DRIVER IC: ST7567  
 LOGIC VOLTAGE: 3.2±0.1V  
 LCD DRIVE VOLTAGE(Vlcd): 9V  
 DRIVING METHOD: 1/65 DUTY, 1/9 BIAS  
 BACKLIGHT COLOR:White  
 OPERATING TEMPRATURE: -20° ~ +70°C  
 STORAGE TEMPRATURE: -30° ~ +80°C  
 INTERFACE CONNECTOR: FPC  
 ALL UNMARKED TOLERANCE: ±0.3mm

**GO0**:Add BL from A02.  
**A02**:Modify FPC ITO layout.  
**A01**:Modify display mode  
**A00**: Original Edition  
 Revision History:

CUSTOMER  
 APPROVAL:



DRAWN:

YXH

2011-06-20

CHECKED:

WYH

2011-06-20

APPROVED:

HHS

2011-06-20

LCM NO: JXZZACW6WFDW

Rev: 00

UNITS: mm

DWG NO: JXZZACW6WFDW

SHEET 2 OF 2

